TRIM EX





TRIM EX SPECIFICATIONS

Ptcon	TE26D	TE26S	TE18C
Total Weight	650 lbs	900 lbs	600 lbs
Total Reach	26'	26'	18'
Total Extended Length	19'	19'	12.5'
Boom Extension	4.5'	4.5'	Foldable for Transport
Blade Size	24"	24"	24"
Flow Range	10-30 gpm	10-30 gpm	10-30 gpm
Boom Type	Di-electric	Steel	Steel, Offset

BUILT FOR LIFE ENGINEERED FOR SUCCESS

Trim Ex tree trimming saws let you tackle tree trimming with small to mid-size carriers you already have. With a working height as high as 26 feet and the ability to rotate the blade, the high-speed saw allows you to make continuous clean cuts from one machine position. Whether in agriculture, landscaping or tree care, take on tree maintenance quickly, safely and efficiently. Boost safety around live wires with the di-electric model.

EFFICIENCY -

- Compatible with a wide range of carriers such as skid steers, compact track loaders, tractors and telehandlers.
- Reduces manual labor by eliminating need for chainsaws, bucket trucks or dedicated forestry machinery.
- TE18C models can fold into a compact position for easy transport and storage.

PRODUCTIVITY -

- Trim Ex models reach up to 26' for easy trimming.
- Minimizes maintenance with no loose chains, bar oil or required daily service.
- Saves time and money compared to bucket truck use for right of way vegetation removal.

PERFORMANCE -

- 3,000 rpm blade achieves continuous, clean cuts from one machine position.
- Carbide blade tips are replaceable.
- Steel housing protects the hydraulic lines.

SAFETY —


- Operator directs tree saw from the safety and comfort of the cab.
- The TE26D features dielectric protection for operation around live wires.

180° SAW HEAD ROATION

Control saw head rotation from the cab for the optimal cutting angle.



TRIM EX 18C BOOM CONFIGURATIONS

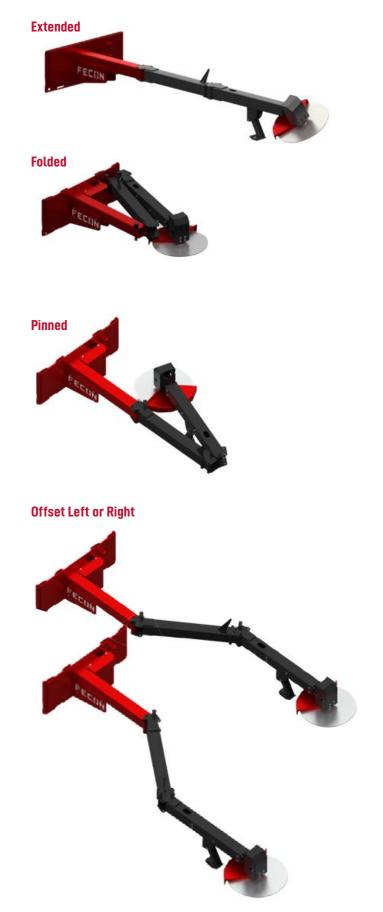



TRIM EX

fecon.com 800 528 3113 sales@fecon.com +1 513 696 4430 Whether you are buying, renting, or servicing your mulching equipment, FECON has solutions that focus on your success. Operator driven design with a global network that is woven into every product.



• Certain guarding and features may have been removed for illustrative purposes.

- · ALWAYS RUN WITH PROPER GUARDING IN PLACE.
- Weights may vary based on options.
- Specifications subject to change without notice.
- · Photographs may have been altered for marketing purposes.
- SAFETY IS THE RESPONSIBILITY OF THE OPERATOR.
- · Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.
- Pictures may contain optional accessories.
- TE_0923