
## CMP Attachments,uc. HYDRR DRRUCHET

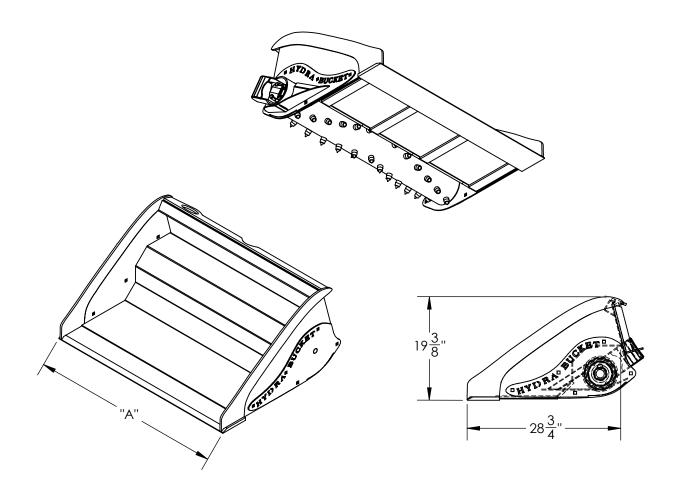

MODEL	WIDTH "A"	STRUCK VOLUME	HEAPED VOLUME	WEIGHT
MHB36	36"	5 1/2 FT <sup>3</sup>	7 FT³	410 LBS
MHB42	42"	6 1/4 FT³	8 FT³	430 LBS
MHB44	44"	6 3/4 FT <sup>3</sup>	8 1/2 FT <sup>3</sup>	440 LBS
MHB48	48"	7 1/4 FT³	9 3/8 FT <sup>3</sup>	460 LBS
MHB54	54"	8 FT³	10 1/2 FT <sup>3</sup>	480 LBS
MHB60	60"	9 FT³	12 FT³	500 LBS

## **Features**

- Made with AR400, AR200, and grade 50 material
- 5" ball bearings that are triple sealed to protect from the elements.
- 2 cutting edges leading up to the drum to shred anything trying to get through.
- 6,700 in/lb Char-Lynn hydraulic motor housed inside the drum for ultimate protection.
  - Capable of handeling 20GPM of hydraulic flow
    - Ultra hard carbide cutter teeth on drum.
- Get additional control from the direct-drive and powerful motor which only protrudes 2.5" beyond the side plate.
  - $\bullet \ \, \text{Crossover relief valves to help dampen shock to the hydraulic system}. \\$ 
    - Completely fabricated in our facility in Clear Lake Minnesota.

R

A

В